


PARAGUARD EXPANSION JOINT

ROOF TO WALL VERSION

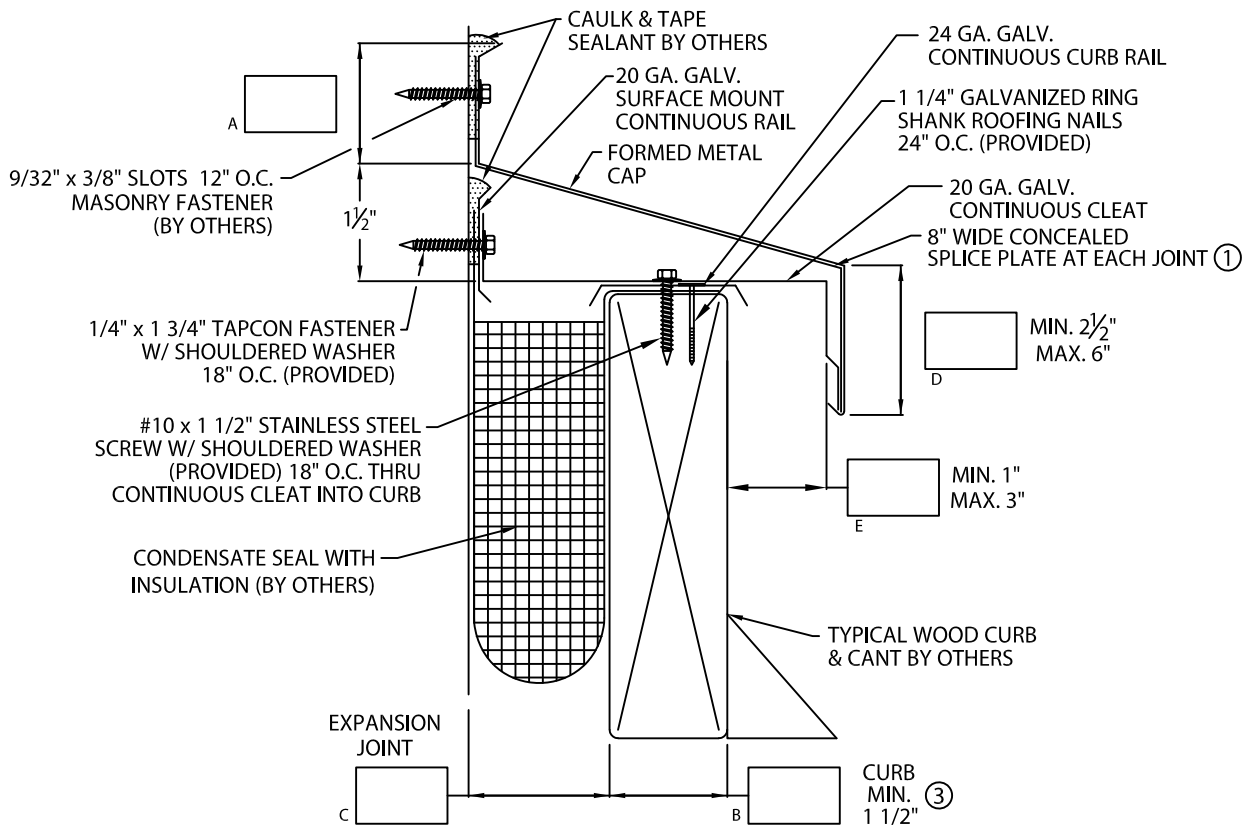

FOR PURPOSES OF CLARITY THE SIPLAST MEMBRANE APPLICATION IS NOT SHOWN.

- ① CONCEALED SPLICE PLATES ARE PROVIDED WITH FACTORY APPLIED DUAL NON-CURING SEALANT STRIPS.
- ② WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".
- ③ CURB SIZE INCLUDES MEMBRANE FLASHING THICKNESS.

MATERIAL:

___ 24 GA. GALV. STEEL ② ___ .050" ALUMINUM
 ___ .040" ALUMINIUM ② ___ .063" ALUMINUM
 ___ OTHER _____

COLOR: _____ FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS
 _____ OUTSIDE MITER(S) @ (_____)°
 _____ INSIDE MITER(S) @ (_____)°
 _____ RIGHT HAND ENDCAP INSERT(S) (AS SEEN FROM ROOF)
 _____ LEFT HAND ENDCAP INSERT(S) (AS SEEN FROM ROOF)
 _____ RIGHT ENDWALL FLASHING(S)* (AS SEEN FROM ROOF)
 _____ LEFT ENDWALL FLASHING(S)* (AS SEEN FROM ROOF)

SPECIFY ACCESSORY TYPE:

- WELDED ②
- QUICKLOCK

* .040" MILL PAINTED/WELDED ONLY

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Siplast's printed instructions.

Approved by: _____

Date: _____

PROJECT:

ROOFING CONTRACTOR:

SHIP TO ADDRESS:

CITY, STATE, ZIP:

PHONE: 800-922-8800

EMAIL: PGUARD@SIPLAST.COM



DATE: 12/10/18

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 44028-28588

C